





Placement Instructions **SOILTEX**




INDOOR ARENAS

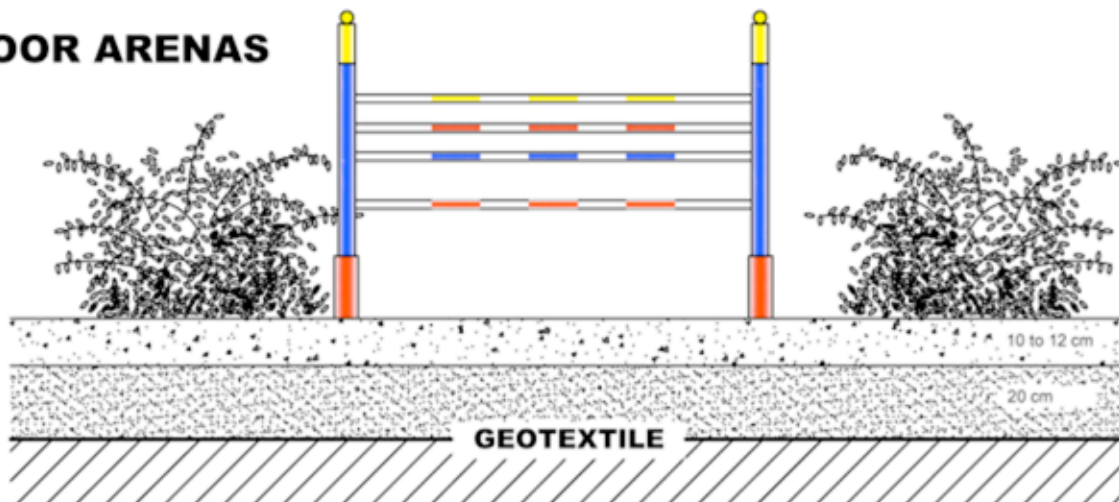

OUTDOOR ARENAS

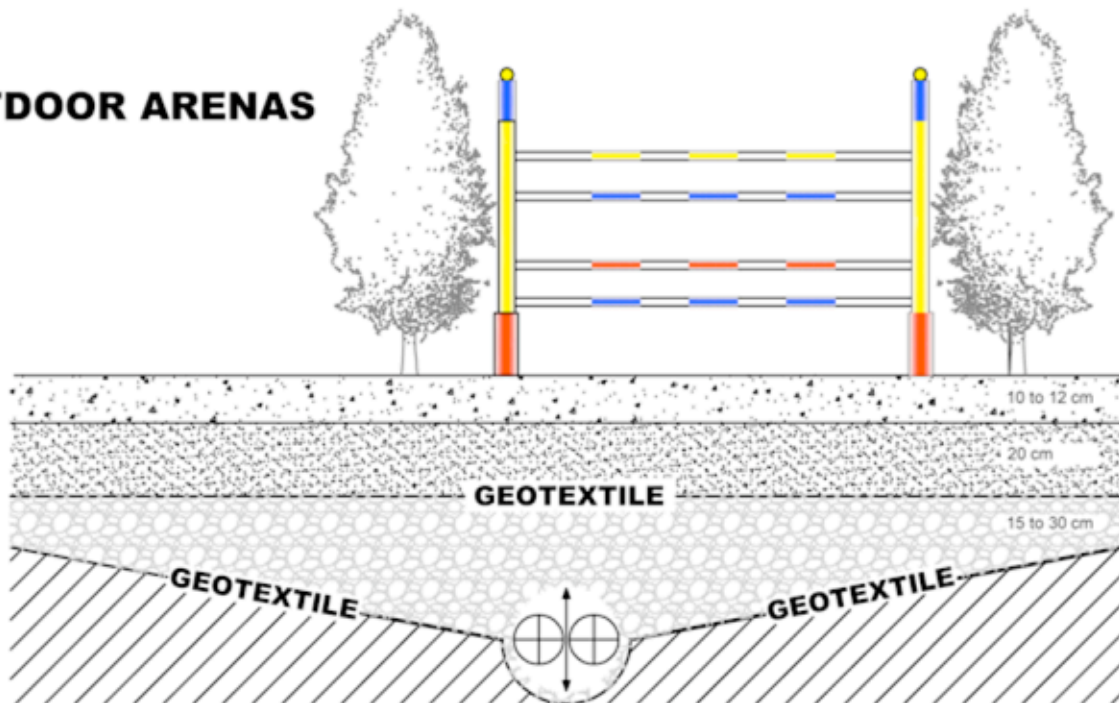

LEGEND




10 to 12 cm top layer of 3 times washed, quarry - wet, sand mixed with soiltex.



20 cm subsurface of 1 time washed sand



0.5 cm non - woven geotextile membrane.



Solid underground

FORMULA : How many Kg **SOILTEX** do you need?

F.e. :

$$20 \text{ m} * 40 \text{ m} = 800 \text{ m}^2$$

$$3 \text{ kg} * 800 \text{ m}^2 = 2400 \text{ kg SOILTEX}$$

How to bring **SOILTEX** on?

Scatter a coating of about 4cm Soiltex all over the surface of the riding arena and then mill the Soiltex about 6 cm deep with a milling machine.



10 to 12 cm top layer of 3 times washed, quarry - wet, sand mixed with soiltex.



20 cm subsurface of 1 time washed sand



0.5 cm non - woven geotextile membrane.



15 to 30 cm layer of porous stones.



Solid underground



Drain pipes wrapped in pebbles